



Marker Paint 360° (V403)

This product can be used in all position thanks to its special 360° valve. This spray is ideal for professional uses on surfaces such as asphalts and walls, but also for domestic use on woods and floors. It's available in different colors.

360° MARKER PAINT - A spray paint for marking masonry, pavements, asphalt, cement and wood. It is resistant to weathering and wear. It is available in fluorescent colors. The product comes with a special "360° valve," so it can be used in any position.



Technical specifications:

Quantity	500 ml
Box / Case	12 Pz.
Aspect	Tin-Plate can containing under pressure fluid
Chemical nature	Synthetic modified resin
Color	fluo-pastel
Odour	Characteristic of solvent
Relative density	At 20°C 0,70÷ 0,74 g/ml
Writings on the bottom	Barcode, date of production, name of product
Flash point	Und. 0° C extremely flammable
Pressure	at 20°C 5,5 ± 0,5 bar
Pressure	At 50°C 8,0 ± 0,5 bar
Viscosity Ford Cup	From 28" to 33"
Dry residual in the can	From 30 to 35 %
Overcoating	everytime
Brillance	From 0 to 15 Gloss (60 ° angle gloss meter)
Operating temperature	-10°C / +100°C (Picchi 150° C)
safety cap child-proof patented	
The product is permanent and resistant to UV rays and humidity.	

Directive 2004/42/CE: C.O.V.
Under category: Special finishing
Limit value COV: 840 g/Liter
Max effective contents: 640 g/Liter


FIELDS OF APPLICATION:

Surfaces in wood, surfaces in metal
concrete, walls, asphalt.

HOW TO USE:

1. Open the cap:

Break the safety seal to open the cap.
Rotate the colored tongue that covers the provider clockwise.

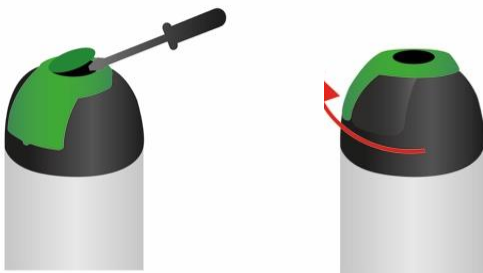

2. Shake emphatically the cylinder for at least 1 minute, up to feel the inside marbles freely stir. It's advised shake desultorily the cylinder during the use.



3. Use the product:

Spray at any angle you want.



4. Rotate the colored tab that protects the provider counterclockwise



MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 5°C and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months (warranty). The product doesn't expire.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

This information, even if reliable, must be considered only approximate. We are not responsible for the wrong use of the product, or the violation of any license. Before using, the users should verify the suitability of the product for its specific use.

BEFORE USE, CONSULT THE SAFETY DATA SHEET OF THE PRODUCT